


GUNNEBO RoundSLING Hook



GUNNEBO
Industrier

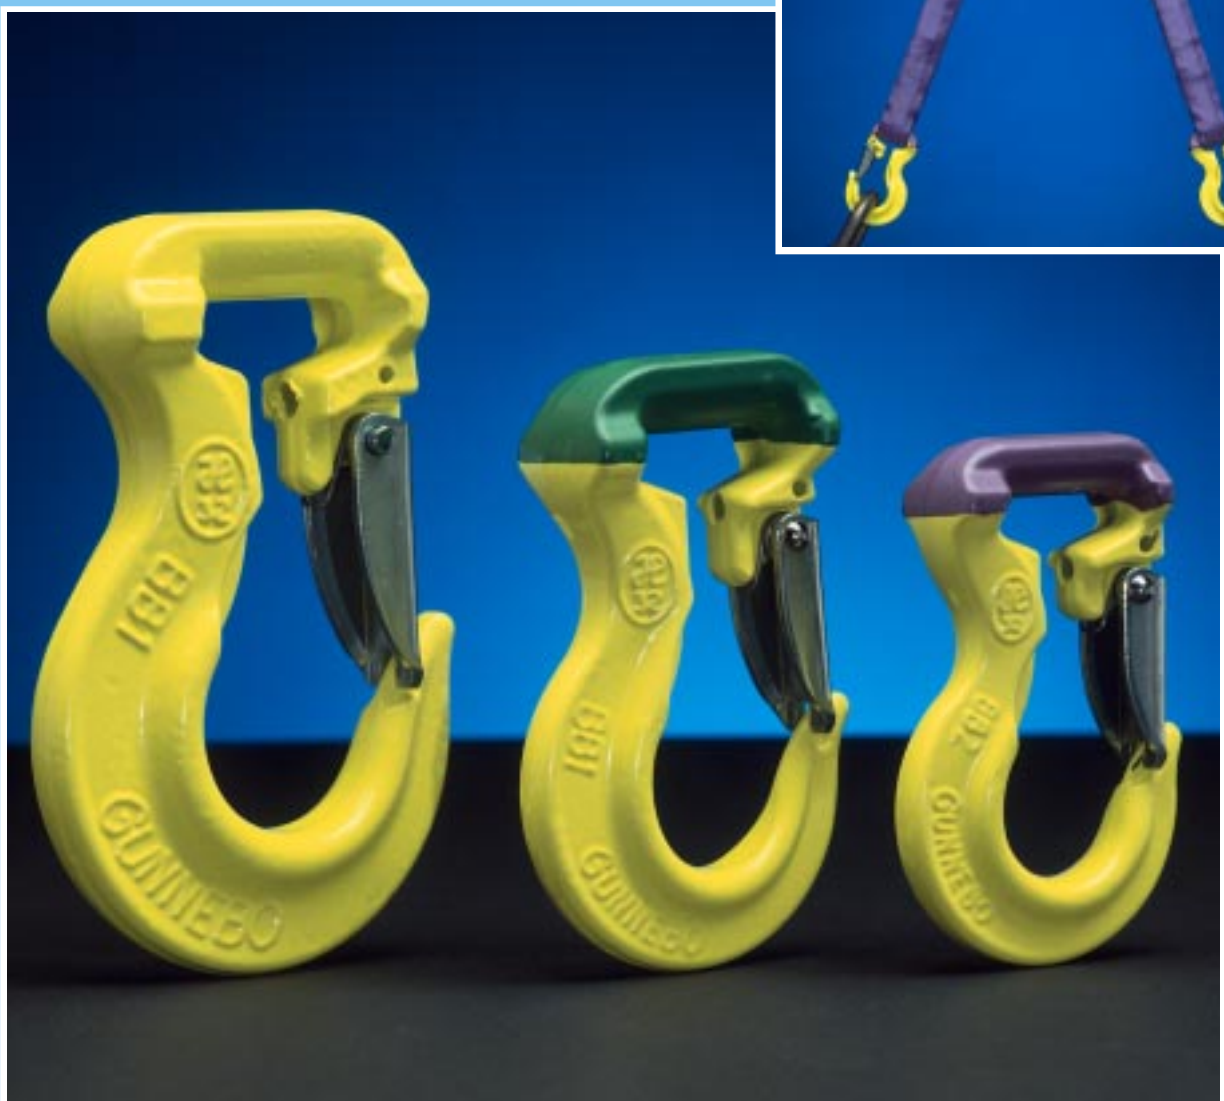

GUNNEBO ROUNDSLING HOOK

A new patented innovation by Gunnebo.

The new RH-hook is a further development of the renowned Gunnebo SKR-coupling system. Skillful design has been employed, a trademark of all Gunnebo Grabiq components, to ensure complete suitability for all softslings applications.

The RH-hook is the perfect load connection solution, combining the advantages of both soft lifting slings and Grade 8+ components.


The RH-hook fully conforms to the requirements of EN-1677 and is approved by BG/PZNM. Safety factor 4:1.



RH-hook with locking set.




RH - 2 Ton - colourcoded.

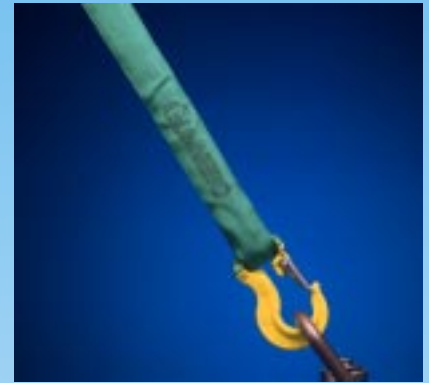

RH - 1-legged sling.

RH - Roundsling Hook, Grade 8+

- Simple and rapid attachment directly into the sling - only a hammer is required for permanent attachment.
- Heavy duty latch, fulfilling the requirements of EN-1677. Protected latch function with stainless steel spring.
- Suitable for both roundsling and webbing slings with eyes – we recommend the use of Gunnebo Polyester Lifting Slings.
- Matched to suit the Working Load Limits of the standard polyester programme. Every hook is colour-coded according to the European Standard for Roundslings and Webbing slings.
- The hook has a large rounded bearing surface at the contact area to protect and support the sling, assuring no reduction in Working Load Limit or Factor of Safety.
- Smooth and contoured profile to prevent snagging.
- The hooks are an ideal, safe and quick way to connect two or more slings to form longer lengths.

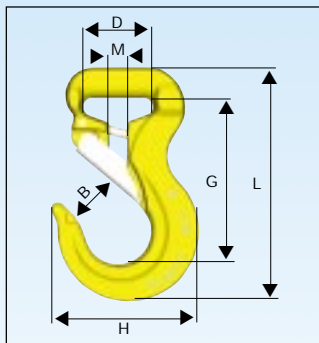

Code	WLL tonnes*	B	D	Dim. in mm				Weight kgs appr.
				G	H	L	M	
RH-1-8+	1,0	24,0	35	84	73	116	8	0,4
RH-2-8+	2,0	28,3	40	96	86	136	10	0,6
RH-3-8+	3,0	33,6	47	117	108	167	12	1,4

*Safety factor 4:1



GUNNEBO INDUSTRIER AB, Business Unit Lifting, Box 44, S-730 60 Ramnäs, Sweden.

Tel: +46 – (0)220 221 00, Telefax: +46 – (0)220 359 61, E-mail: export @gunnebolifting.com, Web page: www.gunnebo.se